


## Single Layer Cold-Applied Bituminous Warm Roof

### ✓ When to Specify

The Euroroo Mono single layer warm roof solution offers all of the benefits of high performance bituminous membranes, combined with quick and safe, flame-free methods of installation. Widely specified on new-build projects due to the time and cost efficiencies it offers, Euroroo Mono also suits roof refurbishment - whether to simply re-establish the integrity of the waterproofing, or to upgrade the thermal performance and/or improve roof drainage.

## Euroroo

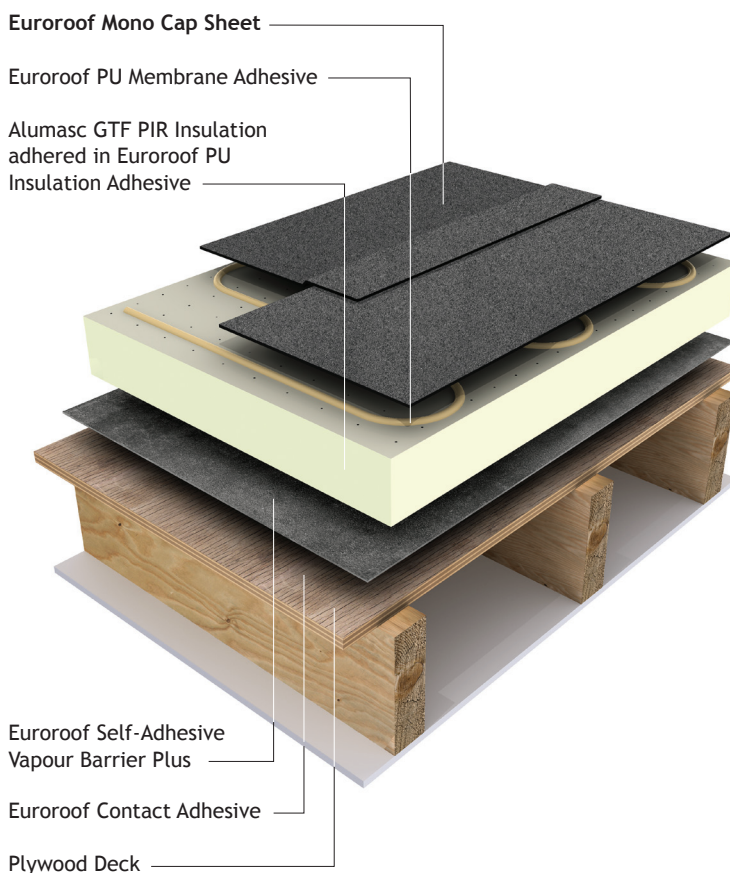

### ☀ Warranties

Alumasc offers a comprehensive range of warranty options. The typical warranty period for Euroroo Mono is 15 years. Installed exclusively by Euroroo Approved Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover both product and installation. Independent insurance backed latent product defect warranties are also available through FSA licensed brokers.

### Key Features

#### Lifespan

The Euroroo Mono membrane has a typical life expectancy in excess of 20 years (under normal UK climatic conditions) and has been rigorously tested against wind uplift in accordance with BS 6399-2:1997.

#### Durability

With high tensile strength and pliability, Euroroo Mono membranes are designed to perform in the harshest conditions, with excellent resistance to puncture and UV degradation. The SBS elastomeric bitumen coating ensures low temperature flexibility.

#### Performance

Euroroo Mono membranes have been specifically developed to provide all of the benefits typically associated with high performance bituminous membranes, without the need to use hot bitumen in the installation process.

#### Cost-effective

The quick, clean and safe installation methods of the Euroroo Mono single layer system provide excellent time and cost efficiencies during construction, whilst equally allowing the building to be operational at the earliest opportunity.

#### Quality

Euroroo Mono membranes are manufactured and independently assessed against the BS EN ISO 9001:2008 Quality Management Standard, ensuring the highest possible consistency of product performance.

#### Environment

Manufactured in accordance with the ISO 14001:2004 Environmental Management Standard, Euroroo Mono membranes score highly in BREEAM ratings (notably in Section MAT5 for the responsible sourcing of materials). Euroroo membranes can also contribute to a very good generic rating in the BRE's Green Guide to Specification, capable of an 'A+' rating when installed on timber or metal decks.

